


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:75		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 80.37 lm/W
MODEL	ALT85-42G30-36	I _{max} (cd)	8684	S/MH(C0/180)	0.55	
NOMINAL POWER(W)	42	LOR(%)	100.0	S/MH(C90/270)	0.55	
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	3375.6	□ UP,DN(C0-180)	0.0,50.4	
NOMINAL FLUX(lm)	3375.57	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.0,49.6	
LAMPS INSIDE	1	□ up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	225	□ down(%)	100.0	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

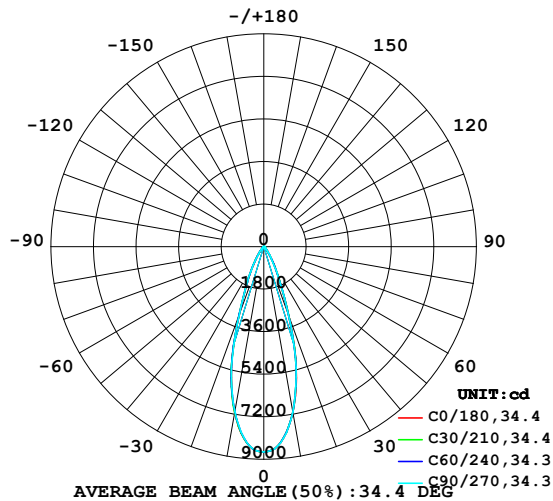

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

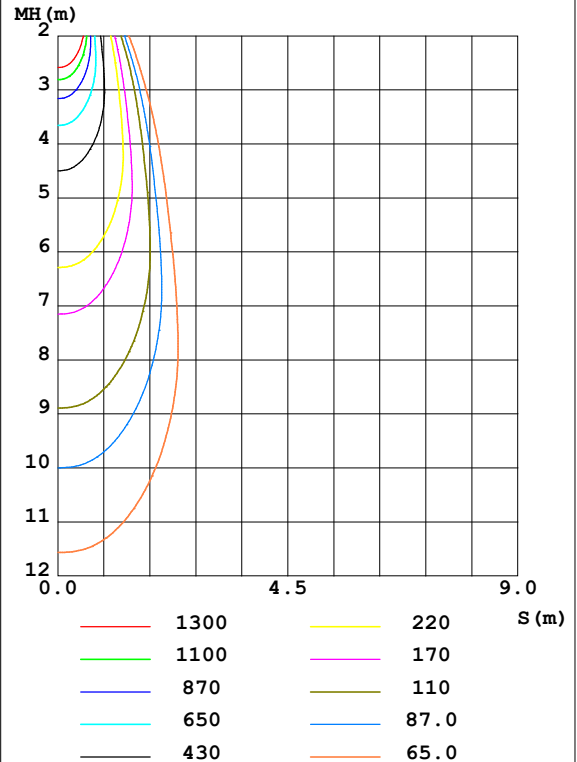

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	7109	7160	7089	7136	7113	7036	7103	7042	0- 10	754.6	754.6	22.4, 22.4
20	3042	3142	3043	3132	3119	3002	3072	2988	10- 20	1414	2169	64.2, 64.2
30	893.2	928.3	895.3	903.1	869.5	845.5	832.7	830.2	20- 30	776.6	2945	87.2, 87.2
40	233.7	234.4	225.5	227.1	228.5	229.4	236.1	233.7	30- 40	292.3	3237	95.9, 95.9
50	56.62	58.15	56.31	55.36	56.31	55.19	55.96	53.54	40- 50	94.35	3332	98.7, 98.7
60	13.57	13.03	13.12	13.42	13.80	12.98	13.63	12.81	50- 60	27.11	3359	99.5, 99.5
70	6.761	6.035	6.459	6.136	6.975	6.482	7.136	6.438	60- 70	9.454	3368	99.8, 99.8
80	2.626	2.562	2.505	2.596	2.361	2.393	2.407	2.349	70- 80	4.539	3373	99.9, 99.9
90	3.177	3.188	3.178	3.192	2.161	2.132	2.129	2.134	80- 90	2.664	3376	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: AE
 Test Date: 2020-03-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 7.240m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

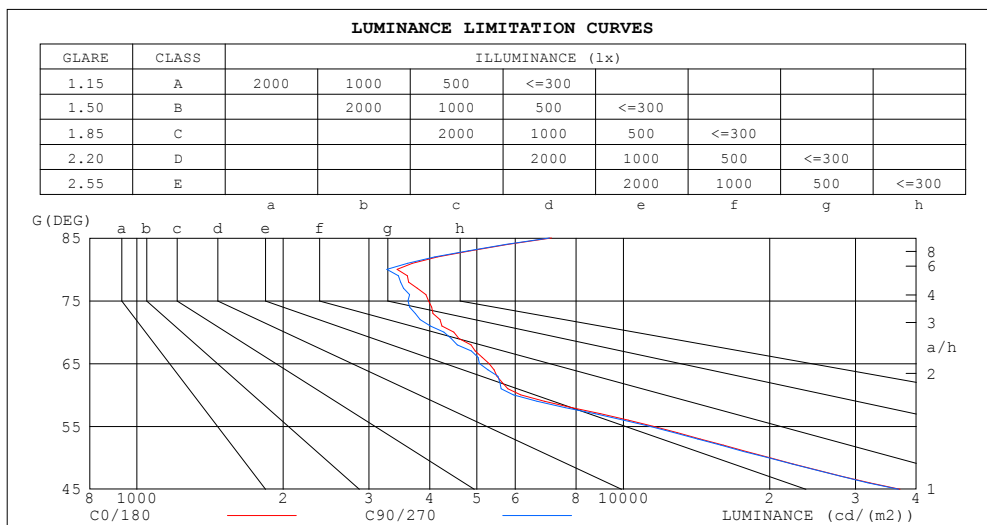

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7113	7052
80	3429	3266
75	3978	3608
70	4482	4275
65	5299	5063
60	6153	5941
55	11511	11316
50	19972	19832
45	37043	36808


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.90	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.90	.87	.94	.90	.86	.92	.88	.85	.90	.87	.85	.88	.86	.84	.82
5.0	.91	.86	.82	.90	.85	.82	.88	.84	.81	.86	.83	.80	.85	.82	.80	.79
6.0	.87	.82	.78	.86	.81	.78	.84	.80	.77	.83	.80	.77	.82	.79	.76	.75
7.0	.83	.78	.74	.82	.78	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
8.0	.79	.75	.71	.79	.74	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.69
9.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.70	.68	.73	.70	.67	.66
10.0	.73	.69	.66	.73	.69	.65	.72	.68	.65	.72	.68	.65	.71	.67	.65	.64

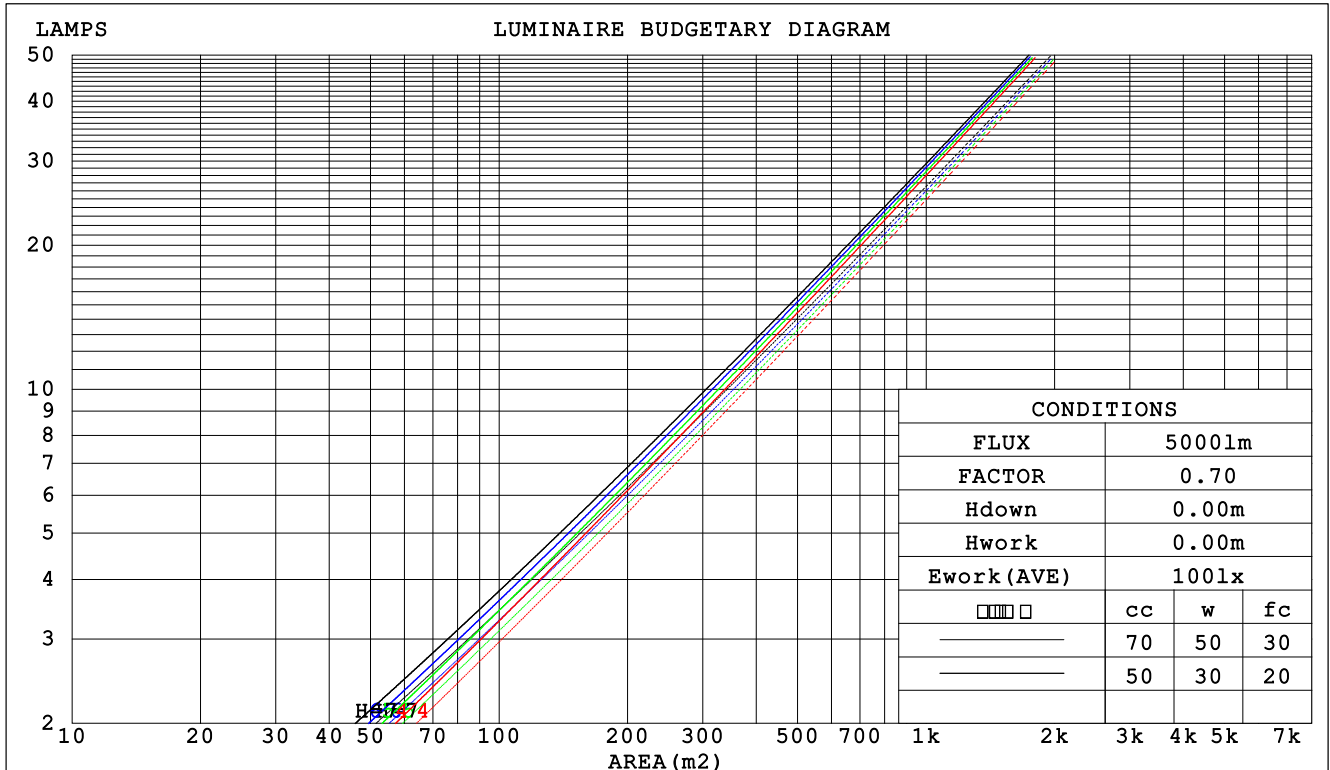

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.155 .088 .028	.148 .085 .027	.136 .078 .025	.124 .072 .023	.114 .066 .021	
2.0	.146 .080 .025	.140 .077 .024	.130 .072 .022	.120 .067 .021	.111 .063 .020	
3.0	.137 .073 .022	.133 .071 .021	.124 .067 .020	.116 .063 .019	.108 .060 .019	
4.0	.130 .067 .020	.126 .066 .019	.118 .063 .019	.111 .060 .018	.105 .057 .017	
5.0	.123 .063 .018	.119 .061 .018	.113 .059 .017	.107 .056 .017	.101 .054 .016	
6.0	.117 .059 .017	.114 .057 .017	.108 .055 .016	.103 .054 .016	.098 .052 .015	
7.0	.111 .055 .016	.109 .054 .015	.104 .052 .015	.099 .051 .015	.095 .049 .014	
8.0	.106 .052 .015	.104 .051 .014	.100 .050 .014	.096 .048 .014	.092 .047 .014	
9.0	.102 .049 .014	.100 .049 .014	.096 .047 .013	.092 .046 .013	.089 .045 .013	
10.0	.098 .047 .013	.096 .046 .013	.092 .045 .013	.089 .044 .013	.086 .043 .012	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.170 .158 .147	.145 .135 .126	.099 .093 .087	.057 .054 .051	.018 .017 .016	
2.0	.153 .133 .116	.131 .114 .100	.090 .079 .070	.052 .046 .041	.017 .015 .013	
3.0	.139 .113 .093	.119 .098 .081	.082 .068 .057	.047 .040 .033	.015 .013 .011	
4.0	.127 .098 .076	.109 .085 .066	.075 .059 .047	.043 .035 .028	.014 .011 .009	
5.0	.118 .086 .063	.101 .075 .055	.070 .052 .039	.040 .031 .023	.013 .010 .008	
6.0	.109 .077 .053	.094 .066 .046	.065 .046 .033	.038 .027 .019	.012 .009 .006	
7.0	.102 .069 .045	.088 .060 .039	.061 .042 .028	.035 .025 .017	.011 .008 .005	
8.0	.096 .062 .039	.083 .054 .034	.057 .038 .024	.033 .022 .014	.011 .007 .005	
9.0	.091 .057 .034	.078 .049 .029	.054 .035 .021	.032 .020 .012	.010 .007 .004	
10.0	.086 .052 .030	.074 .045 .026	.052 .032 .018	.030 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:75			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.9	14.6	14.1	14.8	15.0	13.7	14.5	13.9	14.7	14.8
3H	13.8	14.5	14.0	14.7	14.9	13.6	14.3	13.9	14.5	14.7
4H	13.7	14.4	14.0	14.6	14.8	13.6	14.2	13.8	14.4	14.7
6H	13.6	14.3	13.9	14.5	14.8	13.5	14.1	13.8	14.4	14.6
8H	13.6	14.2	13.9	14.5	14.7	13.5	14.1	13.8	14.3	14.6
12H	13.6	14.2	13.9	14.4	14.7	13.4	14.0	13.8	14.3	14.6
4H 2H	13.7	14.3	13.9	14.6	14.8	13.5	14.2	13.8	14.4	14.6
3H	13.6	14.2	13.9	14.4	14.7	13.4	14.0	13.7	14.3	14.5
4H	13.5	14.1	13.9	14.3	14.7	13.4	13.9	13.7	14.2	14.5
6H	13.5	13.9	13.8	14.3	14.6	13.3	13.8	13.7	14.1	14.4
8H	13.4	13.9	13.8	14.2	14.6	13.3	13.7	13.7	14.1	14.4
12H	13.4	13.8	13.8	14.2	14.6	13.3	13.7	13.7	14.0	14.4
8H 4H	13.4	13.8	13.8	14.2	14.5	13.2	13.7	13.6	14.0	14.4
6H	13.3	13.7	13.8	14.1	14.5	13.2	13.5	13.6	13.9	14.3
8H	13.3	13.6	13.8	14.1	14.5	13.2	13.5	13.6	13.9	14.3
12H	13.3	13.6	13.8	14.1	14.5	13.2	13.5	13.7	13.9	14.4
12H 4H	13.3	13.7	13.7	14.1	14.5	13.2	13.6	13.6	14.0	14.3
6H	13.3	13.6	13.7	14.0	14.5	13.1	13.5	13.6	13.9	14.3
8H	13.3	13.6	13.7	14.0	14.5	13.1	13.4	13.6	13.8	14.3
Variations with the observer position at spacings:										
S = 1.0H	+ 2.8 / - 6.3					+ 2.7 / - 6.3				
1.5H	+ 4.5 / - 5.2					+ 4.3 / - 5.1				
2.0H	+ 4.9 / - 3.8					+ 5.0 / - 3.9				

CIE Pub.117, 3376 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.2)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	101	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	111	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

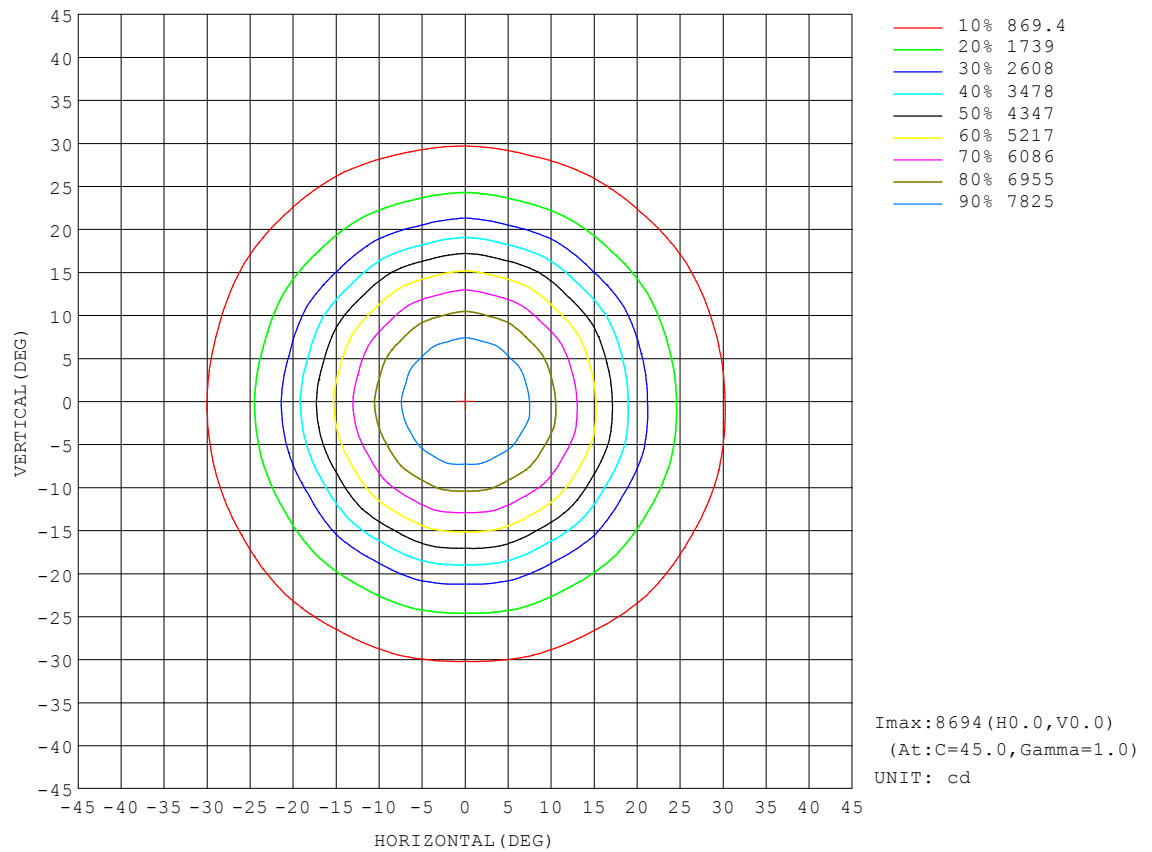


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

AAI Figure

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

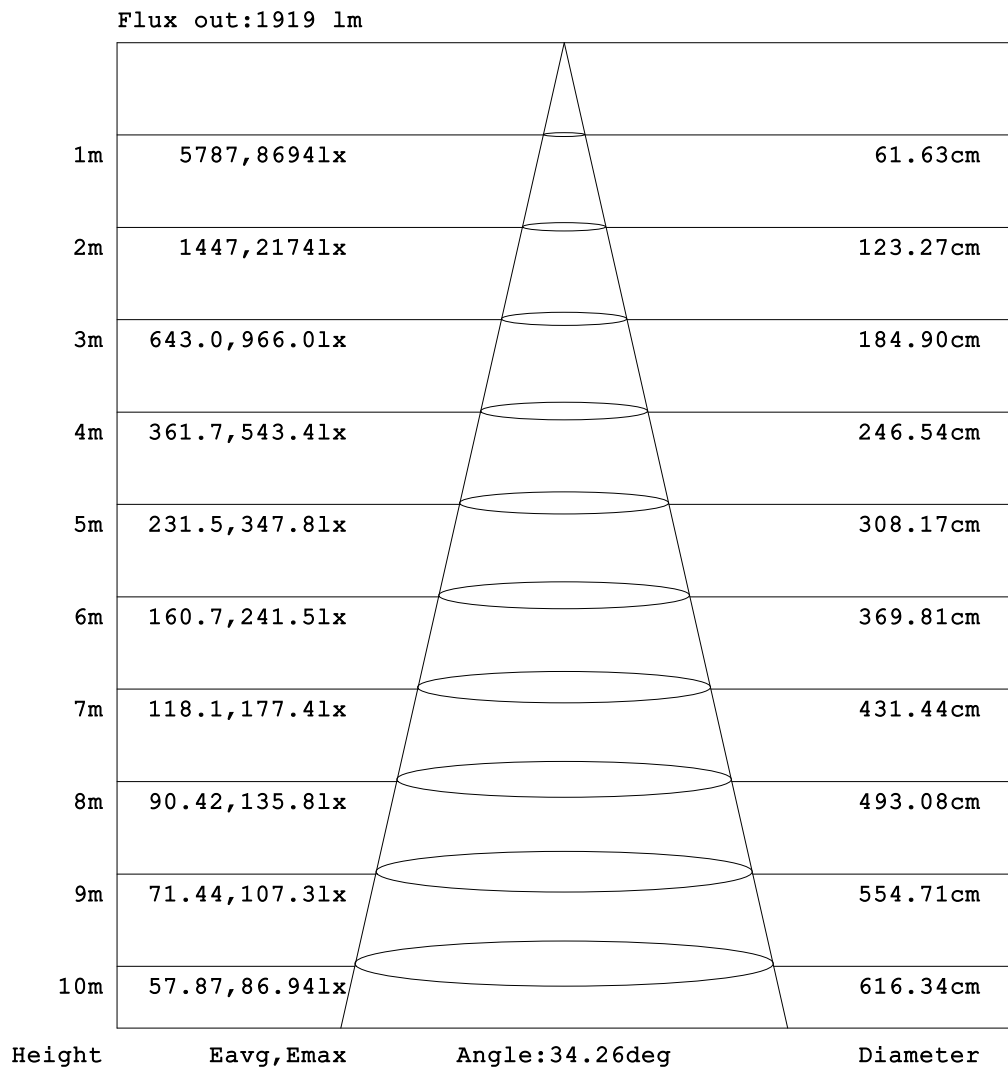


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

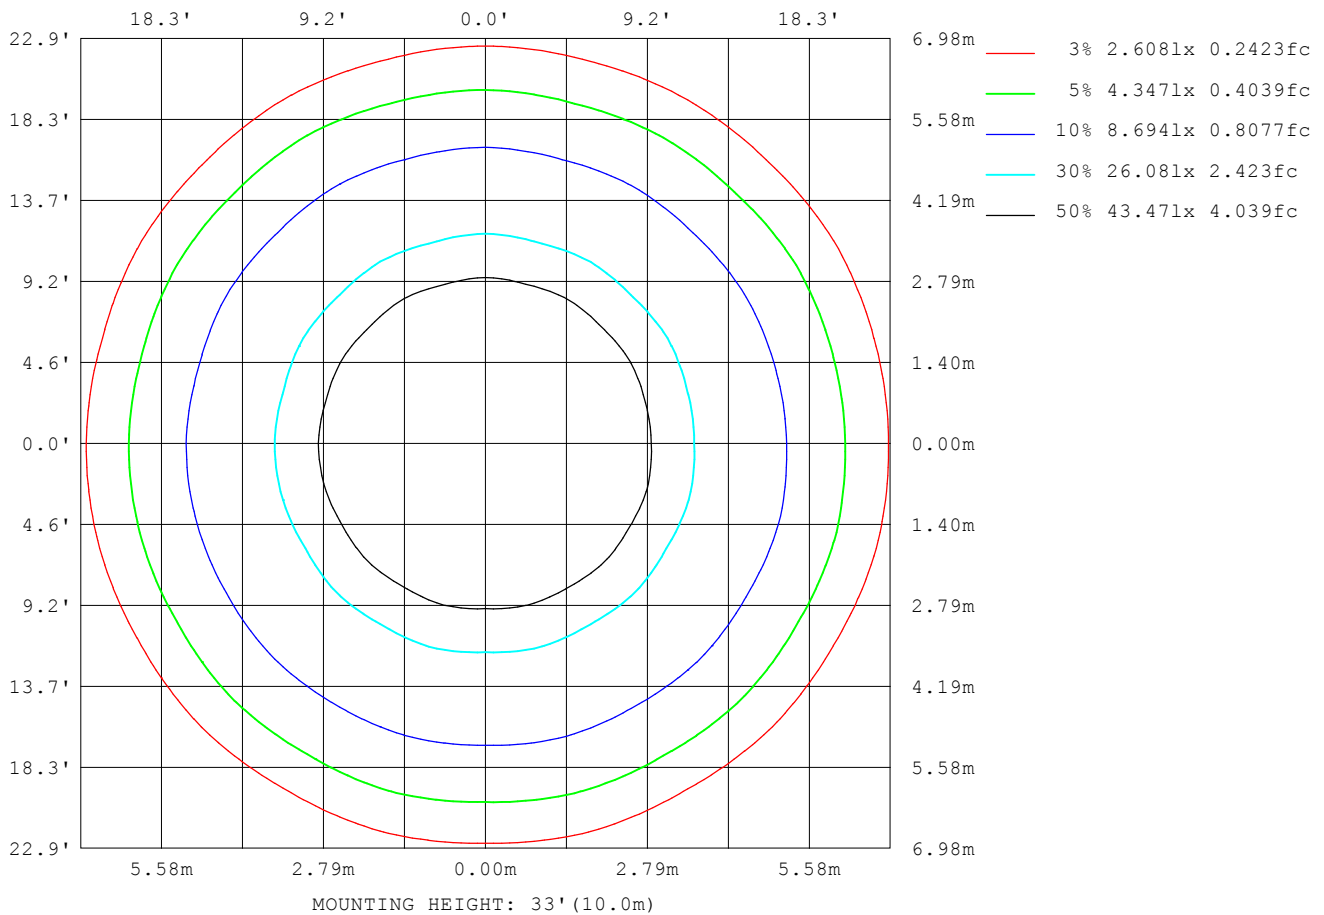

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:225.0V I:0.1920A P:42.00W PF:0.9690 Freq:50.00Hz Lamp Flux:3375.57x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5382
L_0~180 (75) av	3832
L_0~180 (85) av	6256
L_90~270 (65) av	5198
L_90~270 (75) av	3704
L_90~270 (85) av	6220
L_45 (65) av	4884
L_45 (75) av	3641
L_45 (85) av	6289

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

Planar Illuminance Curve

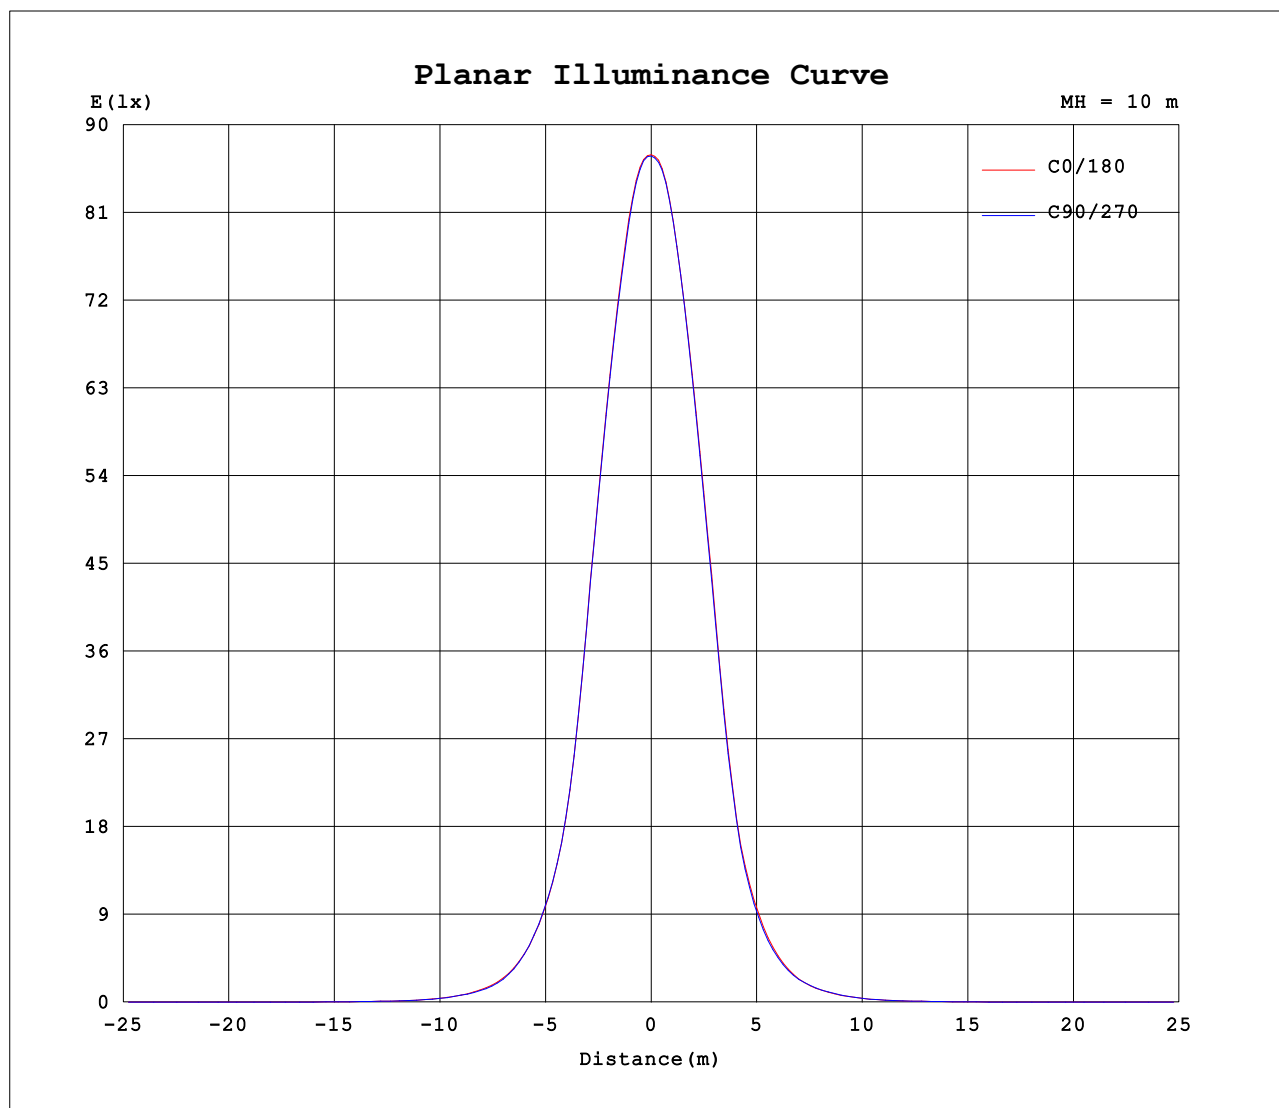

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AE
Test Date: 2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.240m [K=1.0000]
Remarks:

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

```