


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm					
NAME: M20-T41003B-18G40-L24		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:328*21.6		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 87.73 lm/W
MODEL	4000K CRI90	I _{max} (cd)	4709	S/MH(C0/180)	0.43	
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	0.46	
RATED VOLTAGE(V)	226	TOTAL FLUX(lm)	1280.6	η UP,DN(C0-180)	0.0,51.2	
NOMINAL FLUX(lm)	1280.57	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.8	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	225.1	η down(%)	100.0	CIBSE SHR MAX	0.50	

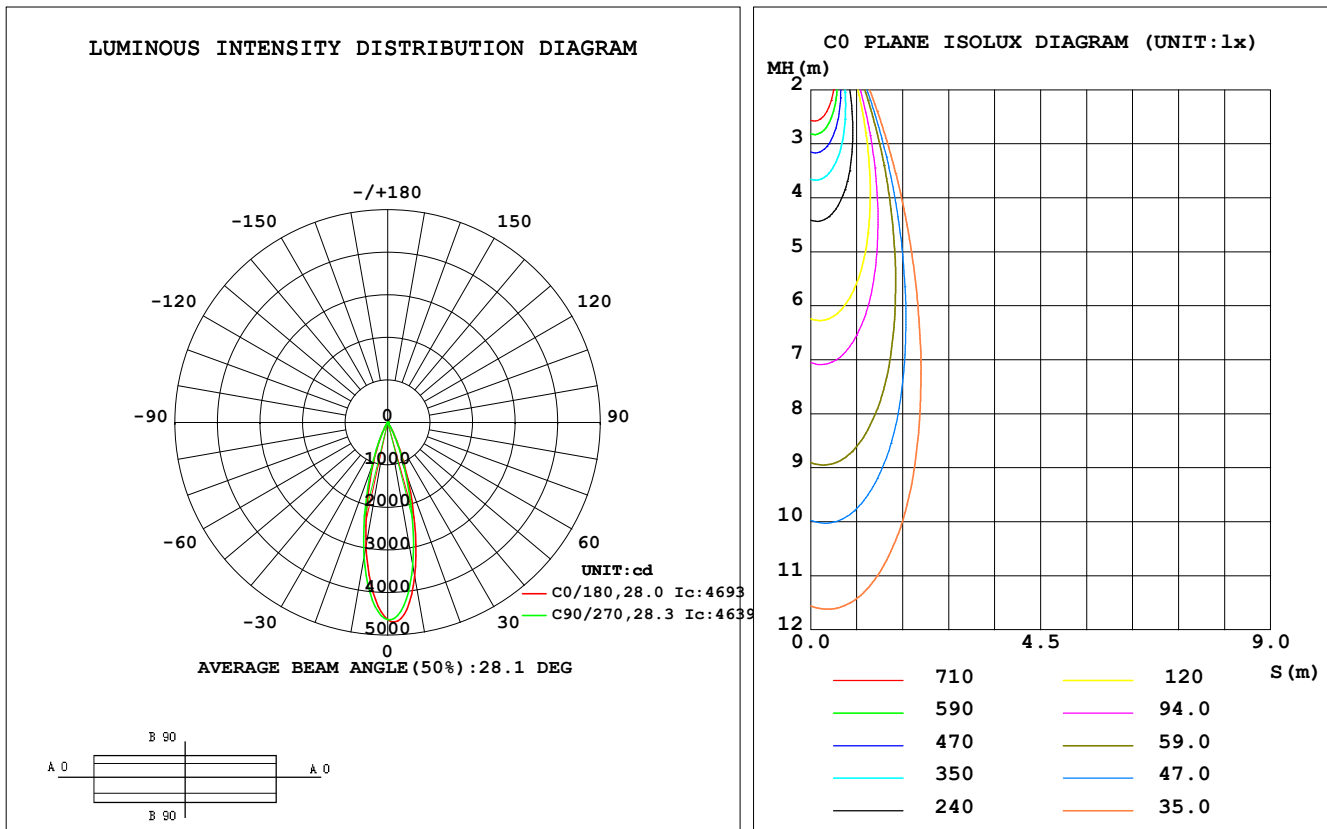

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3680	3666	3411	3086	2951	2976	3208	3548	0- 10	376.1	376.1	29.4, 29.4
20	1352	1344	1207	1043	977.9	955.0	1090	1339	10- 20	582.4	958.5	74.9, 74.9
30	211.2	217.7	183.0	157.2	159.6	146.1	171.0	239.6	20- 30	248.5	1207	94.3, 94.3
40	17.74	17.08	16.24	18.38	34.18	33.23	33.64	37.12	30- 40	46.46	1253	97.9, 97.9
50	3.271	2.674	2.781	3.122	14.44	13.84	14.18	14.95	40- 50	11.87	1265	98.8, 98.8
60	0.8882	0.8925	0.9023	0.9898	7.816	7.805	8.051	8.428	50- 60	5.151	1270	99.2, 99.2
70	1.317	1.282	1.324	1.340	5.518	5.526	5.693	5.934	60- 70	3.942	1274	99.5, 99.5
80	1.557	1.550	1.562	1.594	3.976	3.971	4.099	4.230	70- 80	3.339	1278	99.8, 99.8
90	1.751	1.729	1.758	1.764	2.938	2.932	3.019	3.125	80- 90	2.827	1281	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1260.6 lm

%lum = 98.4%

%lamp = 98.4%

Conical surface Flux(120deg): 1270.5 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: ZR
 Test Date: 2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.402m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:

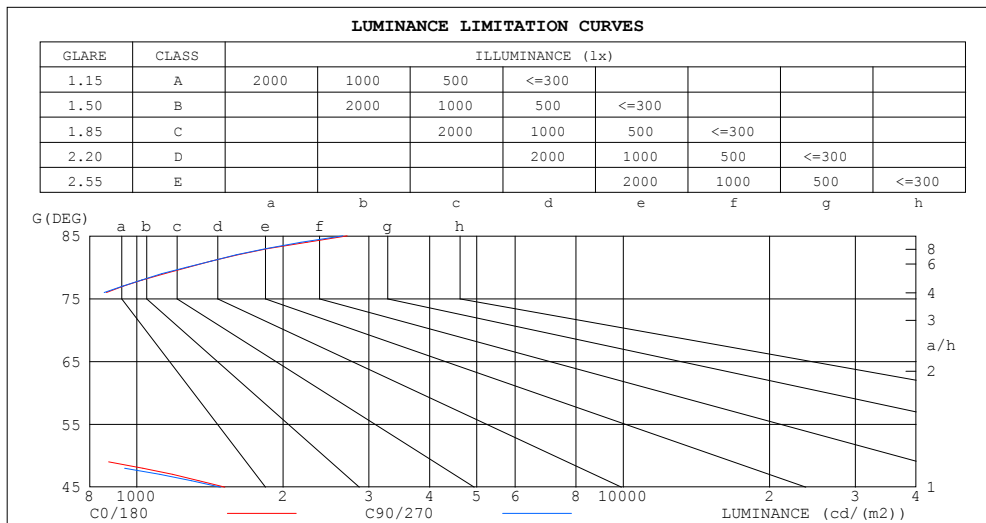


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.98	.98	.96
2.0	1.07	1.04	1.01	1.05	1.02	.00	1.02	.00	.98	.99	.97	.96	.96	.95	.94	.92
3.0	1.02	.98	.95	1.01	.97	.94	.98	.95	.93	.96	.93	.91	.94	.92	.90	.89
4.0	.98	.93	.90	.96	.93	.90	.94	.91	.89	.93	.90	.88	.91	.89	.87	.85
5.0	.94	.89	.86	.93	.89	.86	.91	.88	.85	.90	.87	.84	.88	.86	.84	.82
6.0	.90	.86	.83	.89	.85	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.80
7.0	.87	.83	.79	.86	.82	.79	.85	.82	.79	.84	.81	.78	.83	.80	.78	.77
8.0	.84	.80	.77	.83	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.76	.75
9.0	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.79	.75	.73	.72
10.0	.79	.74	.72	.78	.74	.72	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70

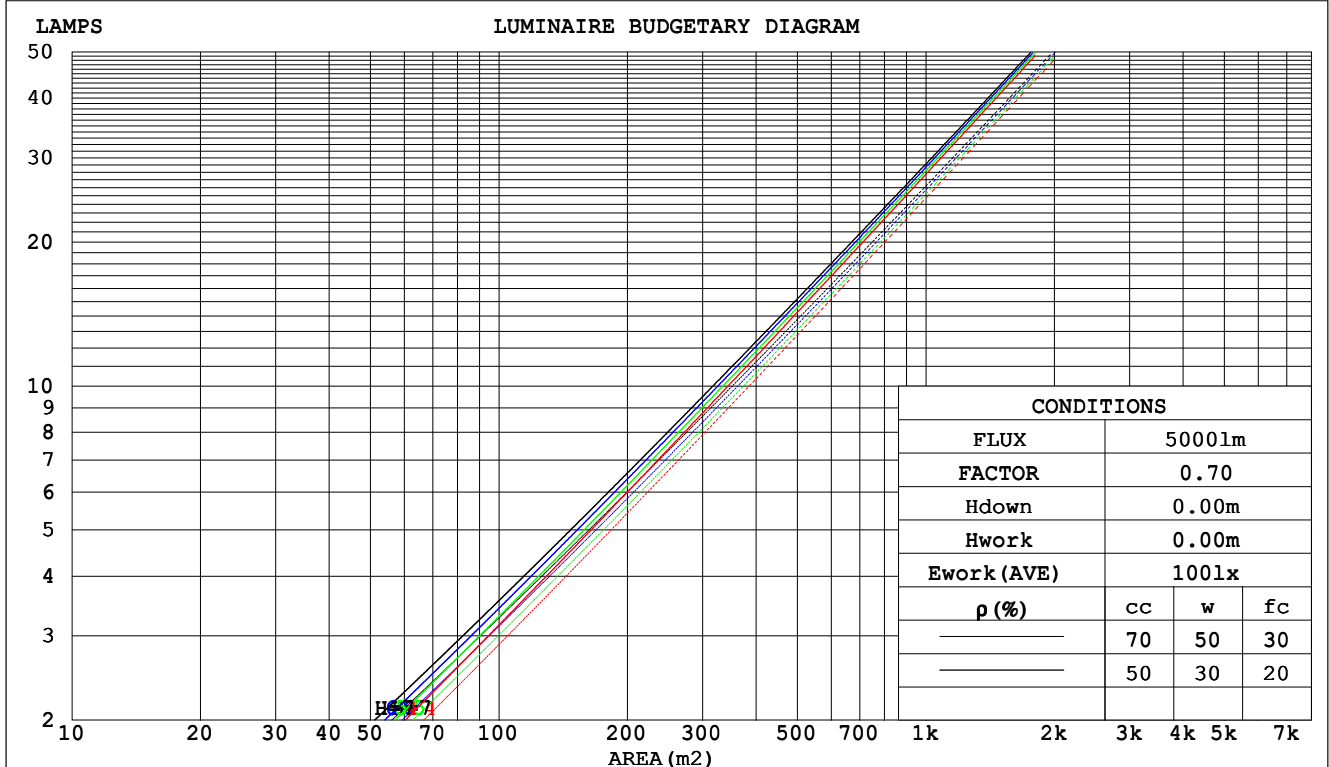

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ZR
 Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.402m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm					
NAME: M20-T41003B-18G40-L24			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:328*21.6		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.146	.083	.026	.139	.079	.025	.127	.073	.023	.115	.067	.021	.105	.061	.020	
2.0	.135	.074	.023	.129	.071	.022	.119	.066	.021	.110	.061	.019	.101	.057	.018	
3.0	.126	.067	.020	.121	.065	.020	.112	.061	.019	.104	.057	.018	.097	.054	.017	
4.0	.118	.061	.018	.114	.060	.018	.107	.057	.017	.100	.054	.016	.094	.051	.015	
5.0	.111	.057	.016	.108	.055	.016	.102	.053	.016	.096	.051	.015	.090	.048	.015	
6.0	.105	.053	.015	.102	.052	.015	.097	.050	.014	.092	.048	.014	.087	.046	.014	
7.0	.100	.049	.014	.098	.049	.014	.093	.047	.014	.088	.045	.013	.084	.044	.013	
8.0	.095	.047	.013	.093	.046	.013	.089	.045	.013	.085	.043	.012	.082	.042	.012	
9.0	.091	.044	.012	.089	.044	.012	.086	.042	.012	.082	.041	.012	.079	.040	.012	
10.0	.088	.042	.012	.086	.041	.012	.083	.040	.011	.079	.039	.011	.077	.039	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.151	.133	.117	.130	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.114	.086	.065	.098	.074	.056	.068	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.106	.076	.055	.091	.066	.048	.063	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.092	.061	.040	.079	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.086	.056	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.070	.044	.027	.049	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm										
NAME: M20-T41003B-18G40-L24					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:328*21.6			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise				Viewed endwise				
x = 2H y = 2H	5.2	5.8	5.4	6.0	6.2	4.6	5.3	4.8	5.4	5.6
	3H	5.1	5.7	5.3	5.9	6.1	4.6	5.2	4.8	5.4
	4H	5.1	5.8	5.4	6.0	6.2	4.6	5.2	4.9	5.4
	6H	5.3	5.9	5.6	6.2	6.4	4.9	5.4	5.1	5.7
	8H	5.6	6.1	5.8	6.4	6.6	5.1	5.7	5.4	5.9
	12H	5.9	6.5	6.2	6.7	7.0	5.5	6.1	5.8	6.3
4H	2H	4.9	5.6	5.2	5.8	6.0	4.4	5.0	4.7	5.2
	3H	4.9	5.5	5.2	5.7	6.0	4.4	4.9	4.7	5.2
	4H	5.0	5.5	5.4	5.8	6.1	4.6	5.1	4.9	5.3
	6H	5.4	5.9	5.8	6.2	6.5	5.0	5.5	5.4	5.8
	8H	5.8	6.2	6.2	6.6	6.9	5.4	5.8	5.8	6.2
	12H	6.4	6.8	6.8	7.2	7.6	6.1	6.5	6.5	6.8
8H	4H	5.0	5.5	5.4	5.8	6.2	4.6	5.0	5.0	5.3
	6H	5.7	6.0	6.1	6.4	6.8	5.3	5.6	5.7	6.0
	8H	6.2	6.5	6.7	6.9	7.4	5.9	6.2	6.3	6.6
	12H	7.1	7.4	7.6	7.8	8.3	6.9	7.1	7.3	7.6
12H	4H	5.1	5.4	5.5	5.8	6.2	4.6	5.0	5.0	5.3
	6H	5.7	6.0	6.2	6.5	6.9	5.4	5.7	5.8	6.1
	8H	6.4	6.7	6.9	7.1	7.6	6.1	6.4	6.6	6.8
Variations with the observer position at spacings:										
S = 1.0H	+ 1.7 / - 1.2					+ 1.3 / - 1.0				
1.5H	+ 3.5 / - 1.1					+ 2.7 / - 1.0				
2.0H	+ 0.7 / - 0.3					+ 0.7 / - 0.3				

CIE Pub.117, 1281 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.9)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	90	84	81	89	84	81	78
0.80	97	92	89	97	92	88	95	91	88	85
1.00	101	96	93	100	96	92	99	95	92	88
1.25	105	100	97	104	99	96	102	98	96	92
1.50	107	103	100	106	102	99	104	101	98	94
2.00	109	106	103	108	104	102	105	103	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	115	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:

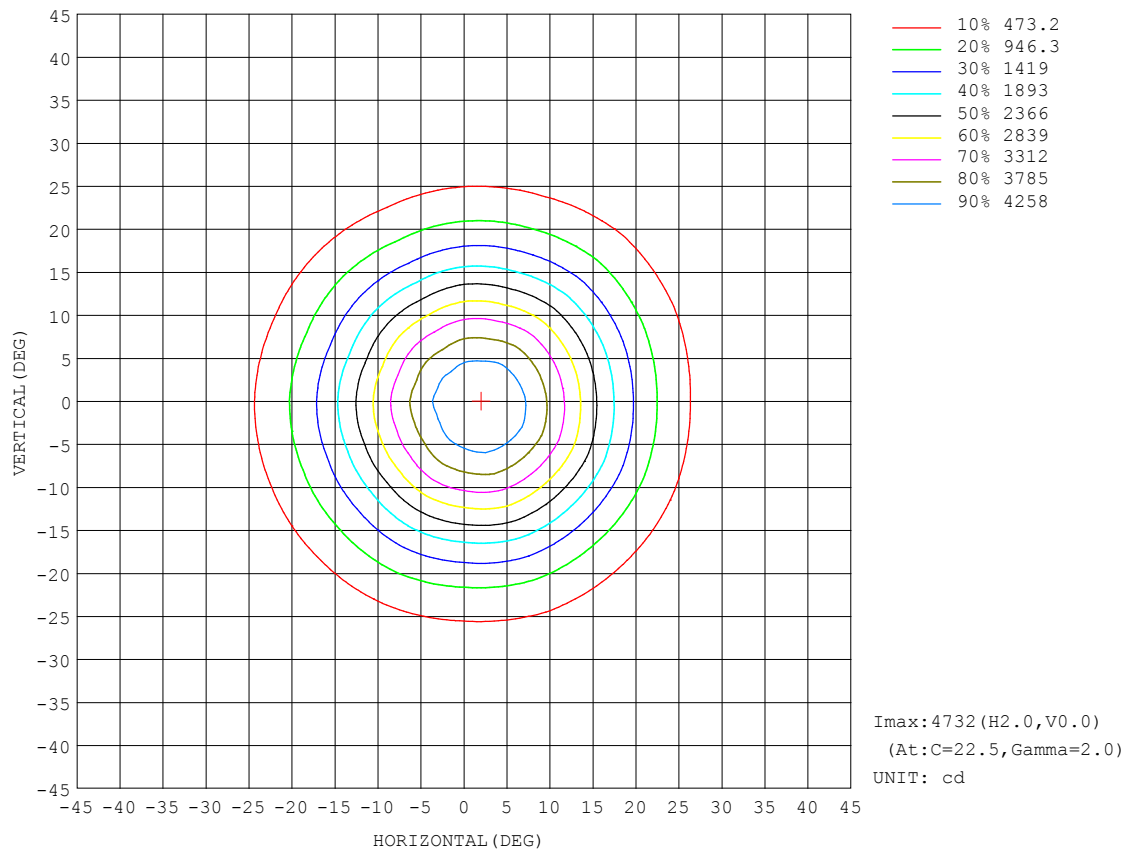


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

AAI Figure

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:

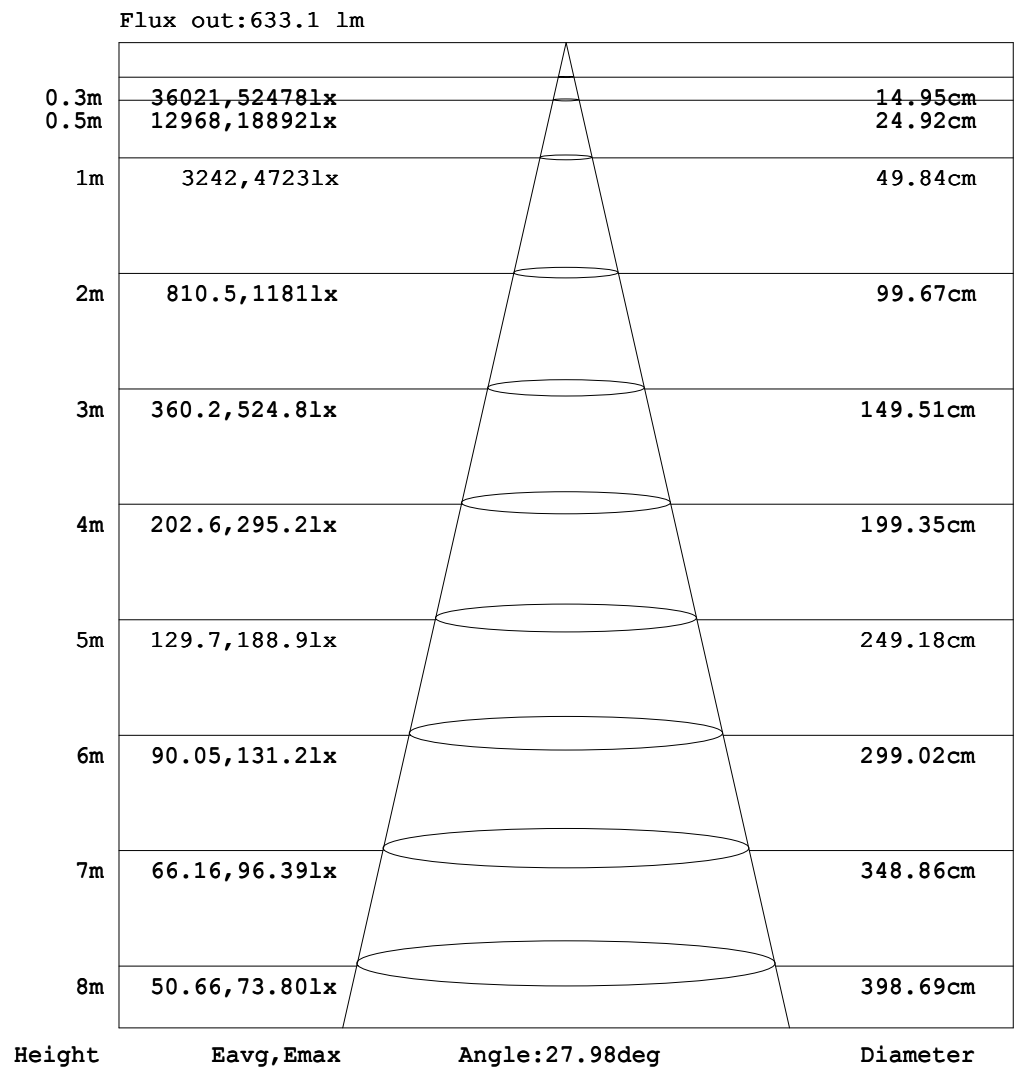


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:

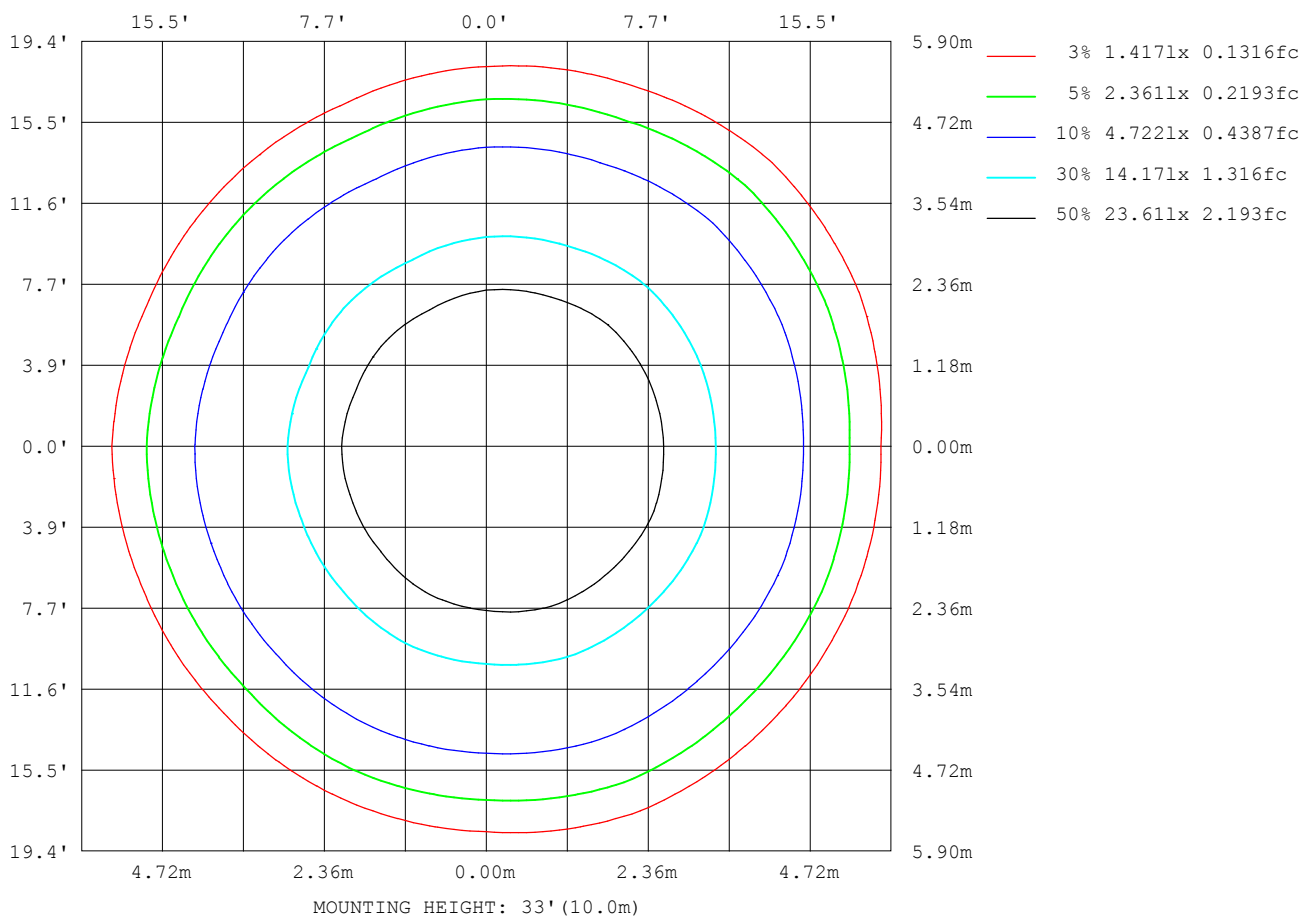

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:48.00V I:0.3041A P:14.60W PF:1.000 Freq:50.00Hz Lamp Flux:1280.57x1 lm		
NAME: M20-T41003B-18G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:328*21.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1278
L_0~180 (75) av	1659
L_0~180 (85) av	4096
L_90~270 (65) av	1316
L_90~270 (75) av	1704
L_90~270 (85) av	4195
L_45 (65) av	1328
L_45 (75) av	1714
L_45 (85) av	4202

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ZR
 Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.402m [K=1.0000]
 Remarks:

Planar Illuminance Curve

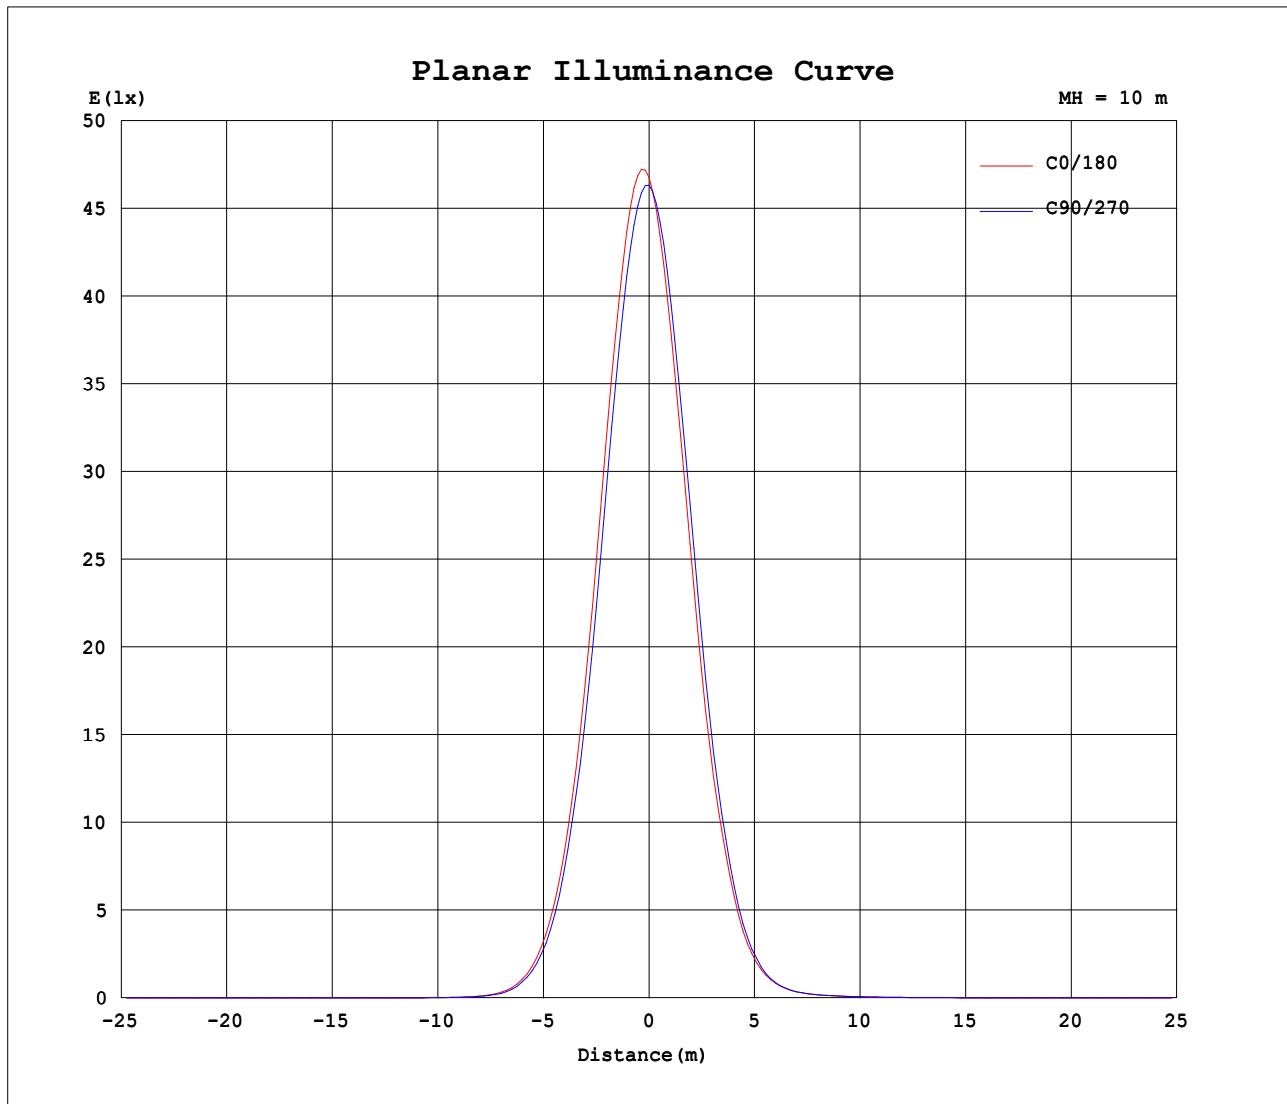

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ZR
Test Date: 2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity: 65.0%
Test Distance: 8.402m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

```